

# 3060

## 59 HP



## 3060

*59 Horsepower*

*Fuel-Efficient Turbocharged  
Engine with Water Cooling*

*Mechanical Transmission*

*5,290 lb Rear Lift Capacity*

### 3060

#### ENGINE

59 HP (Gross)  
4 cyl. / 3.8 L

#### TRANSMISSION

4 gears x 3 ranges  
Mechanical shuttle  
transmission

#### HYDRAULICS

3 standard rear hydraulic valves  
1 mid mount valve  
1 front remote


#### LIFT CAPACITY

Front lift capacity: 1,300 lb  
Rear lift capacity: 2,645 lb  
Max. permissible total  
weight: 5,290 lb

### 3060

#### SPECIFICATIONS

Standard Front Tires	280/70 R16
Standard Rear Tires	360/70 R24
Length (in)	120
Width (in)	57
Height (in)	89
Wheelbase (in)	70
Base Weight (lb)	3,785
Max. Weight (lb)	5,290

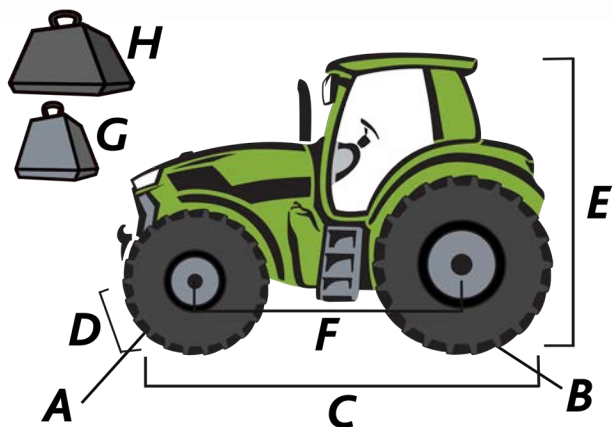

## 3060 Specs

### Engine

Manufacturer		Perkins
Emissions		Stage V
Cylinders/displacement	n°/l	4/2.2
Max power	hp	59
Engine speed at max. power	rpm	2600
Maximum torque	ft lbs	125.4
Engine speed at maximum torque	rpm	1600
Fuel tank capacity	gal	10.6

### Transmission

Full mechanical transmission		•
4 gears x 3 ranges		•
Mechanical shuttle		•
Creeper		○
Maximum speed	mph @ rpm	18 @ 2295

### PTO

Mechanically-engaged rear 540 PTO		•
Electrohydraulic-engaged front 1000 PTO		○

### Hydraulics

Hydraulic pump flow	gpm	7.9
Mechanical distributors		•

### Lift capacity

Rear lift capacity	lb	2,645
Front lift		○
Front lift capacity	lb	1,300

### Axles and Brakes

Mechanically-engaged 4wd		•
Front axle with 100% diff. lock		•
Electro-hydraulic engagement of diff. lock		•
Hydrostatic steering with independent pump		•
Steering pump flow	gpm	3.7

### Cab

Heating and ventilation		•
Air conditioning		•
Activated carbon air filter		○

### Dimension and weight

Width	in	55
Maximum height - cab	in	90
Total unladen weight - cab	lb	4,155
Total admissible load	lb	5,290

• = standard    ○ = optional